




RODGER INDUSTRIES INC.

Kieselmann Ball Valve Range

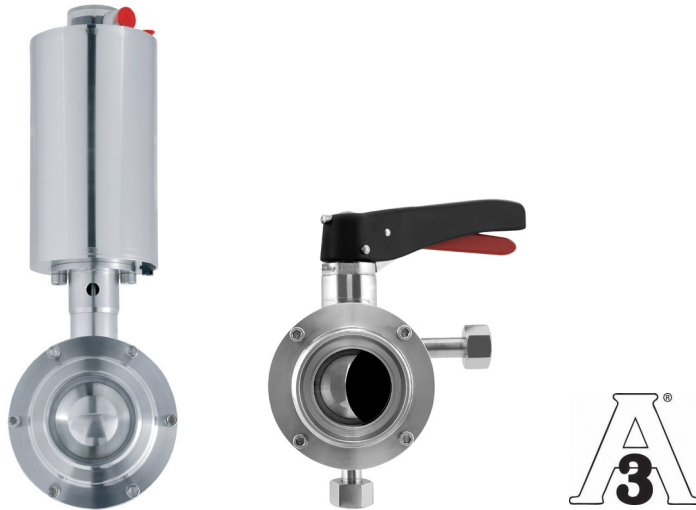

Technical Data

Installation sizes	DN 25 – 100 / 1" – 4"
Thread connections for Rinsing Connections & Heat Jacket	G 1/2 (DIN EN ISO 228-1)
Materials in product contact	1.4404 / AISI 316L
Sealing materials	EPDM (SIP 140° C, 30 min) PTFE (SIP 130° C, 30 min) NBR (SIP 110° C, 30 min) FKM (SIP 140° C, 30 min)
Surfaces product wetted	Ra. ≤ 0.8 µm, electropolished
Operating pressure	16 bar
Operating temperature	95° C
Control air	5.5 – 8 bar
Available connections	Clamp Weld Threaded

Within The Ball Valve Range:



** Three-way models also available, contact our office for more information

Official Canadian Distributor of



KIESELMANN

FLUID PROCESS GROUP

Advantages:

- 3A certified
- Piggable
- Spring loaded shaft seal
- Easily switch from manual to pneumatic

Additional Options:

- Blue & Red Manual Handle
- Pneumatic Actuator
- Pneumatic Actuator with Position Indicator
- Plastic KI-TOP Control Head
- Stainless Steel KI-TOP Control Head

Options:



Black & Red Handle
(Standard)



Blue & Red Handle



Pneumatic Actuator



Pneumatic Actuator
with Position Indicator



Plastic KI-TOP
Control Head



Stainless Steel KI-TOP
Control Head

RODGER INDUSTRIES INC.

P.O. BOX 40
8913 Talbot Trail
Blenheim, Ontario
CANADA N0P 1A0

+1 (519) 676-3244

+1 (519) 676-4955

www.rodgerindustries.com

info@rodgerindustries.com