



Leakage Butterfly Valves

Kieselmann stainless steel valves ensure top quality in dimensional stability and surface finish. Kieselmann increases the service life of the seals with a shape optimization.

- Cost-efficient leakage protection
- Easy mounting
- Sealing materials: EPDM & HNBR
- Hygienic design with external connections for cleaning of the leakage chamber
- Simple design benefits from single seal element making servicing easy
- Ergonomic heat protection handle (your choice of handle colours)
- Construction allows for easy maintenance
- Automation option
- Maintenance-free universal actuator with 5 year warranty

Installation sizes:	DN 50 – 150 / 2" – 4"
Materials product wetted:	1.4404 / AISI 316L
Sealing materials:	EPDM (SIP 140° C, 30 min) HNBR (SIP 110° C, 30 min)
Surfaces product wetted:	Ra. ≤ 0.8 µm, electropolished
Operating pressure: DN 50-100 / 2"/4" DN125 DN 150	10 bar 6 bar 4 bar

*Manual Leakage
Butterfly Valve*



*Vannes papillon avec
chambre de fuite*

*Pneumatic Leakage
Butterfly Valves*





*Vannes papillon chambre de
fuite, pneumatique*

Vannes Papillon avec Chambre de Fuite

Les vannes en acier inoxydable Kieselmann garantissent la meilleure qualité en termes de maintien des dimensions et de qualité de la surface. Grâce à l'optimisation de la forme, Kieselmann a augmenté la durée de vie des isolants.

- Protection contre les fuites économique
- Montage facile
- Matériau d'étanchéité EPDM, HNBR
- Plus hygiénique grâce à la possibilité de nettoyage de la chambre de protection de fuite
- Construction facile d'entretien avec uniquement un élément d'étanchéité et donc remplacement facile de l'étanchéité
- Poignée de protection thermique ergonomique (au choix dans la couleur souhaitée)
- Construction à maintenance réduite
- Option d'automatisation
- Entraînement universel sans maintenance avec 5 ans de garantie

Tailles de Construction:	DN 50 – 150 / 2" – 4"
Matériaux en contact avec le produit:	1.4404 / AISI 316L
Joint:	EPDM (SIP 140° C, 30 min) HNBR (SIP 110° C, 30 min)
Surfaces en contact avec le produit:	Ra. ≤ 0,8 µm, poli
Pression de fonctionnement: DN 50-100 / 2"/4" DN125 DN 150	10 bar 6 bar 4 bar

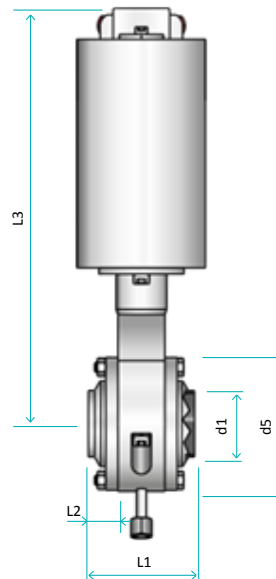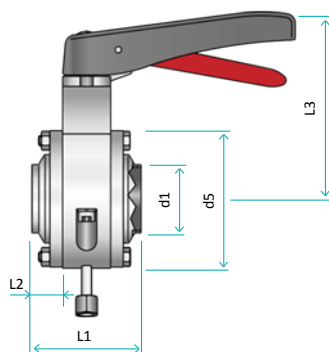


Part #	Size	d1 inches (mm)	d5 inches (mm)	L1 inches (mm)	L2 inches (mm)	L3 inches (mm)
K43672	2"	1.870 (47.5)	4.252 (108)	3.386 (86)	0.945 (24)	5.827 (148)
K436725	2.5"	2.370 (60.2)	5.118 (130)	3.386 (86)	0.945 (24)	6.221 (158)
K43673	3"	2.870 (72.9)	5.748 (146)	3.504 (89)	0.945 (24)	6.575 (167)
K43674	4"	3.835 (97.4)	6.535 (166)	3.504 (89)	0.945 (24)	7.008 (178)
K4367050	50DN	1.969 (50)	4.252 (108)	3.386 (86)	0.945 (24)	5.827 (148)
K4367065	65DN	2.598 (66)	5.118 (130)	3.386 (86)	0.945 (24)	6.221 (158)
K4367080	80DN	3.189 (81)	5.748 (146)	3.504 (89)	0.945 (24)	6.575 (167)
K4367100	100DN	3.937 (100)	6.535 (166)	3.504 (89)	0.945 (24)	7.008 (178)
K4367125	125DN	4.921 (125)	8.071 (205)	3.898 (99)	0.906 (23)	7.126 (181)
K4367150	150DN	5.906 (150)	9.449 (240)	5.906 (150)	0.906 (23)	7.835 (199)

Part #	Size	d1 inches (mm)	d5 inches (mm)	L1 inches (mm)	L2 inches (mm)	L3 inches (mm)
K4367AA2	2"	1.870 (47.5)	4.252 (108)	3.386 (86)	0.945 (24)	13.347 (339)
K4367AA25	2.5"	2.370 (60.2)	5.118 (130)	3.386 (86)	0.945 (24)	13.740 (349)
K4367AA3	3"	2.870 (72.9)	5.748 (146)	3.504 (89)	0.945 (24)	14.095 (358)
K4367AA4	4"	3.835 (97.4)	6.535 (166)	3.504 (89)	0.945 (24)	16.102 (409)
K4367AA050	50DN	1.969 (50)	4.252 (108)	3.386 (86)	0.945 (24)	13.347 (339)
K4367AA065	65DN	2.598 (66)	5.118 (130)	3.386 (86)	0.945 (24)	13.740 (349)
K4367AA080	80DN	3.189 (81)	5.748 (146)	3.504 (89)	0.945 (24)	14.095 (358)
K4367AA100	100DN	3.937 (100)	6.535 (166)	3.504 (89)	0.945 (24)	16.102 (409)
K4367AA125	125DN	4.921 (125)	8.071 (205)	3.898 (99)	0.906 (23)	15.827 (402)
K4367AA150	150DN	5.906 (150)	9.449 (240)	5.906 (150)	0.906 (23)	16.024 (407)




For more information!
Simply open the camera on your smart phone and point at the above code to view the valve animation on our YouTube Channel.

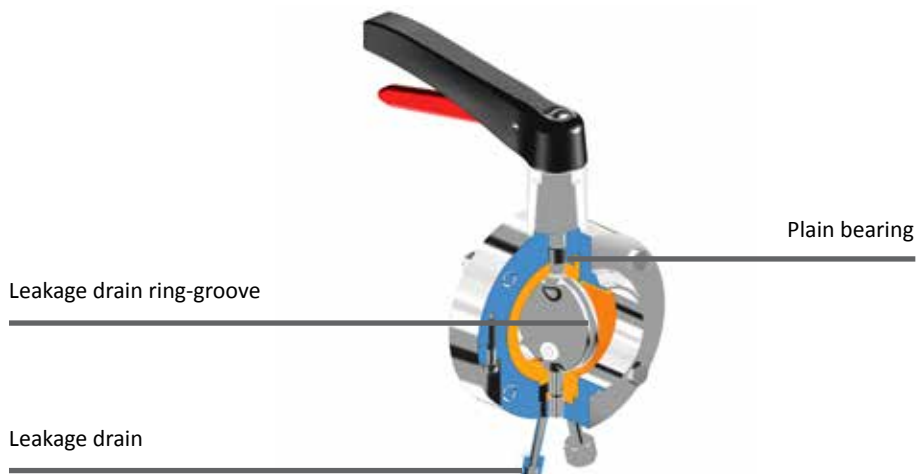

RODGER INDUSTRIES INC.

P.O. BOX 40
8913 Talbot Trail
Blenheim, Ontario
CANADA N0P 1A0

+1 (519) 676-3244

+1 (519) 676-4955

www.rodgerindustries.com

info@rodgerindustries.com